



Features & Options

- Designed for Monitoring Overpressure, Vacuum and Differential Pressure of Air or Other Non-Combustible, Non-Aggressive Gases
- Ideal for Air Filter and Fan Status Monitoring, Industrial Cooling-Air Circuit Monitoring, Duct Air Flow Monitoring, Air Flow Proving for Heater Control and Frost Prevention Circuits
- Field-Adjustable Dial to Select Any Trip Value Within Each Pressure Range

Total Probes and Tubing

Two static pressure probes and two meters of pressure tubing are available as an accessory.



Beck Adjustable Pressure Switch



Specifications

Burst Pressure: 40" WC (10 kPa) for all pressure ranges

Medium: Air, non-combustible and non-aggressive gases

Operating Temperature: -4° to +185°F (-20 to +85°C)

Storage Temperature: -40°F to +185°F (-40 to +85°C)

Accuracy:

Deviation: $\pm 15\%$, min. ± 0.04 " WC (± 10 Pa) • Drift: $\pm 15\%$

Diaphragm Material:

Silicone, tempered at 392°F (200°C), free of gas emissions

Pressure Connections:

2 plastic pipe connection pieces, external dia. 0.24" (6mm)
Marked "+" to higher pressure, marked "-" to lower pressure

Body and Cover Material: UV-resistant plastic

Mechanical Working Life: Over 1,000,000 switching operations

Electrical Rating:

0.4A Inductive, 250 VAC • 1.5A Resistive, 250 VAC
0.8A Inductive, 125 VAC • 3.0A Resistive, 125 VAC
0.4A, 30VDC • 0.1A, 24 VDC



Electrical connections:

1/4" Spade Plug (AMP flat plug), 0.25" x 0.03" (6.3 x 0.8mm) in accordance with DIN 46244 or push-on screw terminals included

Protection Category: IP54 or IP65

Cable Conduit - M20 threads for 0.25" to 0.375" OD cable (6.5 to 9.5mm)

CE Conformity: Low Voltage Directive 2014/35/EU; RoHS Directive 2011/65/EU

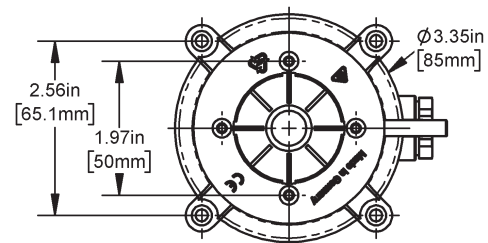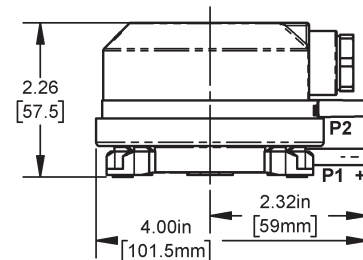



Beck Adjustable Pressure Switch

D19

Zone Pressure Sensors

Ordering Information

Part Number	Pressure Range	Accuracy/ Repeatability	Encl. Rating
BA/APSW1	0.08 to 1.2" WC / 20 to 300 Pa	±5% / min. ±0.02" WC (±5 Pa)	IP54
BA/APSW2	0.2 to 2" WC / 50 to 500 Pa	±2.5% / min. ±0.02" WC (±5 Pa) ..	IP54
BA/APSW3	0.8 to 4" WC / 200 to 1,000 Pa	±1% / min. ±0.02" WC (±5 Pa)	IP54
BA/APSW4	0.12 to 1.6" WC / 30 to 400 Pa	±5% / min. ±0.02" WC (±5 Pa)	IP54
BA/APSW5	2 to 10" WC / 500 to 2,500 Pa	±1%	IP54
BA/APSW6	4 to 20" WC / 1,000 to 5,000 Pa	±1%	IP54
BA/APSW1-65	0.08 to 1.2" WC / 20 to 300 Pa	±5% / min. ±0.02" WC (±5 Pa)	IP65
BA/APSW2-65	0.2 to 2" WC / 50 to 500 Pa	±2.5% / min. ±0.02" WC (±5 Pa) ..	IP65
BA/APSW3-65	0.8 to 4" WC / 200 to 1,000 Pa	±1% / min. ±0.02" WC (±5 Pa)	IP65
BA/APSW4-65	0.12 to 1.6" WC / 30 to 400 Pa	±5% / min. ±0.02" WC (±5 Pa)	IP65
BA/APSW5-65	2 to 10" WC / 500 to 2,500 Pa	±1%	IP65
BA/APSW6-65	4 to 20" WC / 1,000 to 5,000 Pa	±1%	IP65
BA/APSW-ACC	2 Total Pressure Tubes and 2 Meters of Pressure Tubing		



Gray shaded items follow the Buy and Resale Multiplier.

